


HES-6800 HOME ELEVATOR SERIES



About BELIFT

BELIFT is a homegrown company using advanced technology to improve elevators and escalators, providing efficient, comfortable, and safe experiences.

We are committed to creating custom solution for elevators and escalators with excellent craftsmanship and endless design possibilities.

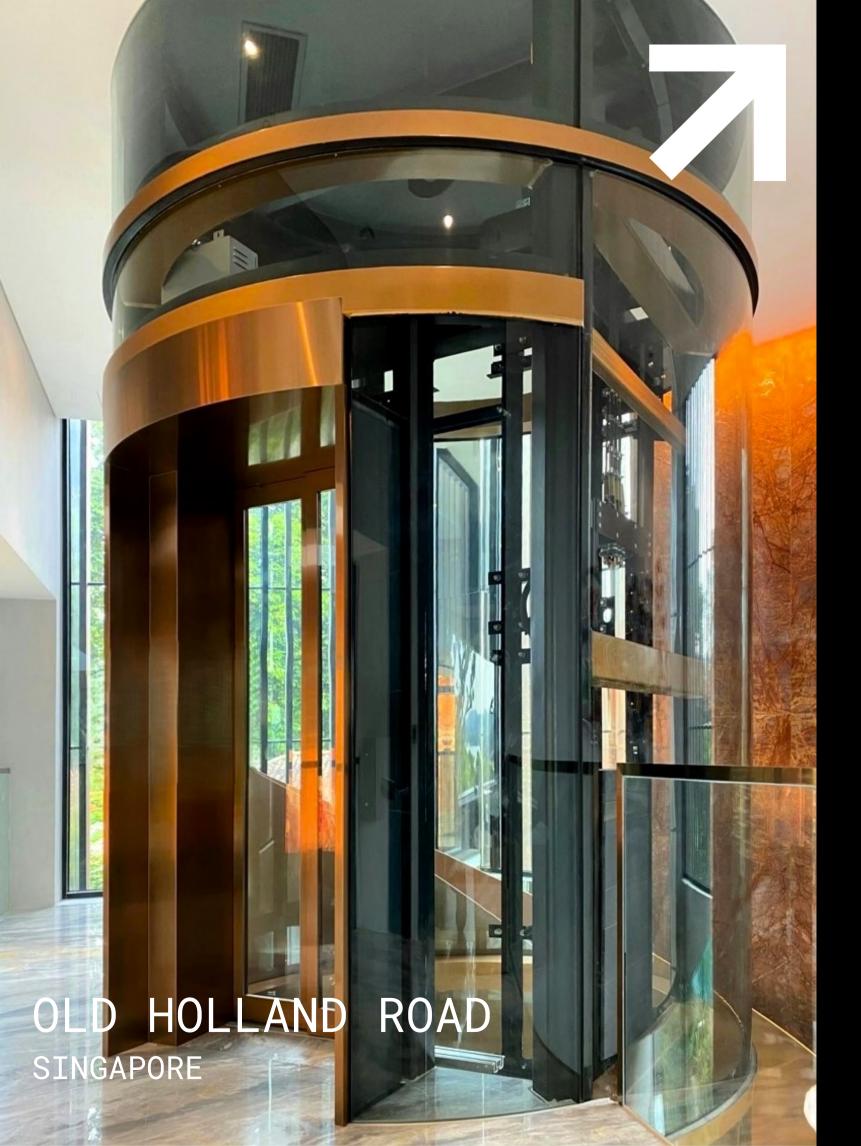

Contents

01.

Product introduction

02.

Technical specifications

03.

Cabin styling options

04.

Accessories options

05.


Maintenance services

06.

Contact us



ELEVATING
THE WAYS IN
WHICH
PEOPLE
LIVE, WORK
AND PLAY.

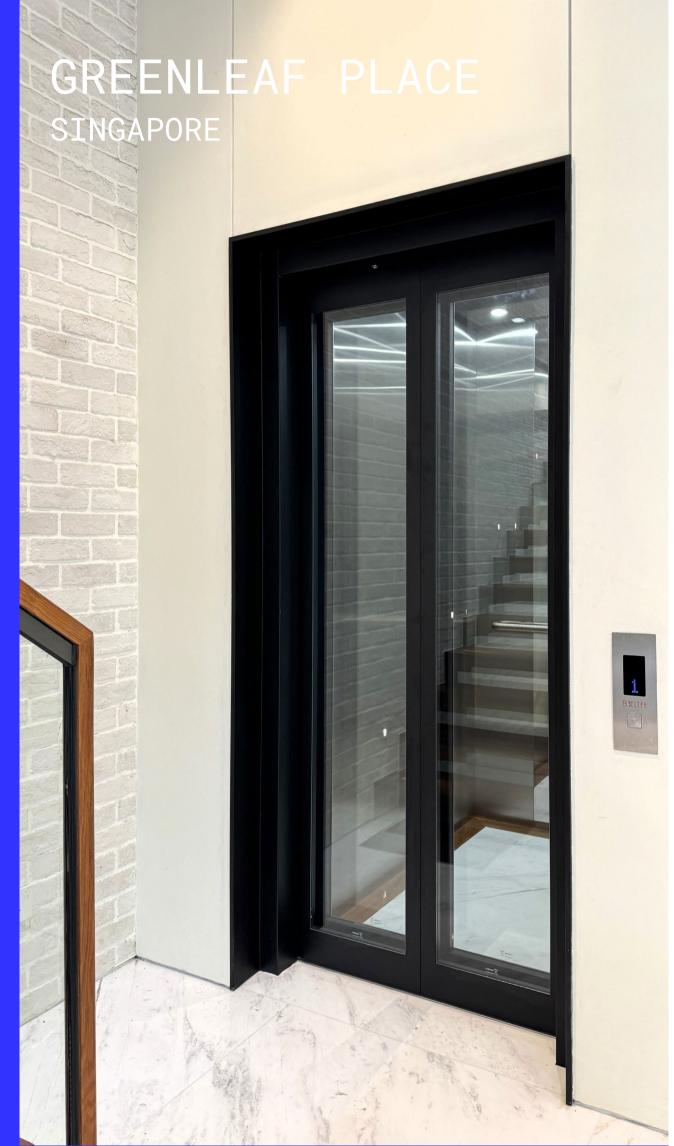

Product Introduction



BELIFT emphasis in bringing exceptional ride comfort, and safe experiences. HES-6800 achieve these by using a state- of-the-art gearless motor and inverter.

Ideal for private villas, landed properties and compact shaft requirements.

Our passion for designing cabins combine innovative class and unparalleled functionality.

Key Features


Home Use

Single/Adjacent /Through Car Entrance

Automatic Rescue Device

0.63 m/s or 1.00 m/s Superior ride comfort

Boundless styling options available

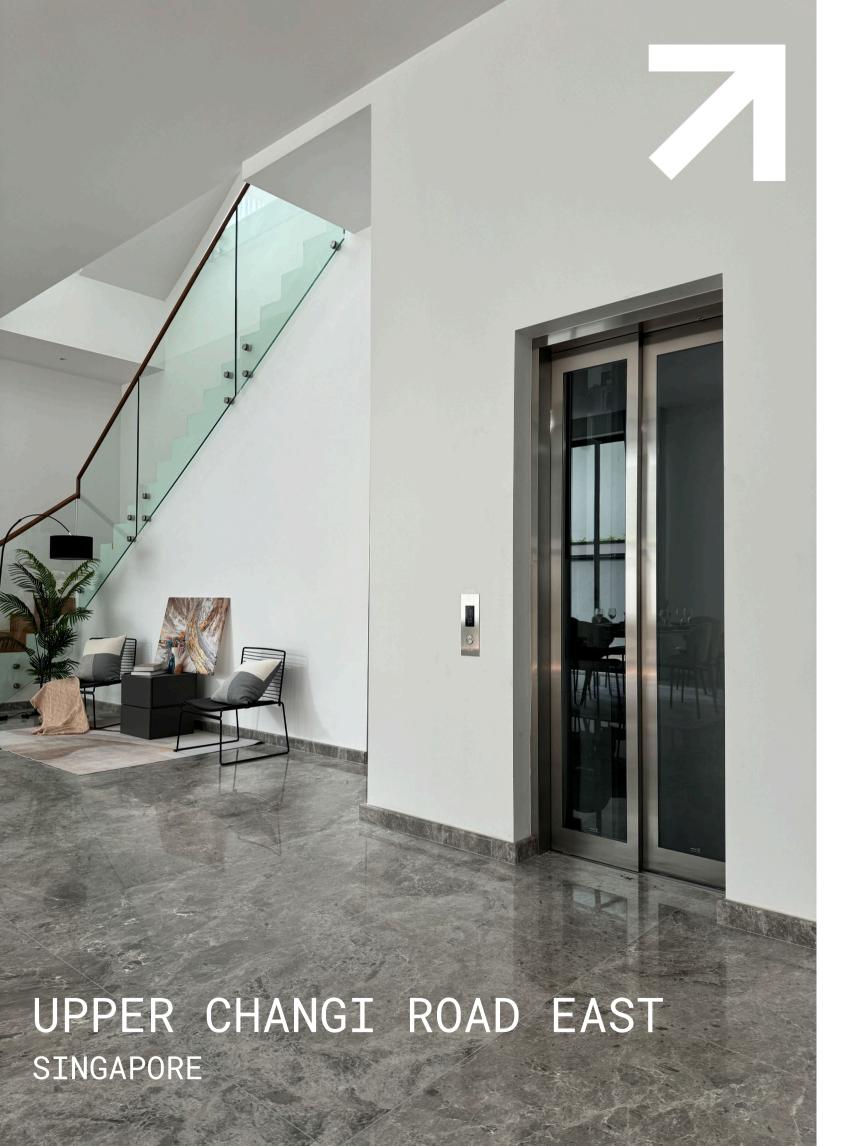

Key Components



MONADRIVE GEARLESS TRACTION MACHINE

Are highly efficient, compact, and require less maintenance due to fewer moving parts. They operate smoothly and quietly. Their space-saving design allows for machine-room-less setups.



MONARCH CONTROLLER

Is a compact elevator controller, widely adopted in the industry, combines the inverter and main control board, elevates the riding experience through enhanced performance and a sleek design.




ESHINE Elevator Door Systems

Offers customizable, comprehensive elevator door systems that ensure functionality, safety, and aesthetic appeal.


Smart Lift Technology


Remote Monitoring and Diagnostics (RM&D) for lift provide key benefits by improving maintenance and performance. RM&D allows real-time tracking of lift systems, detecting issues early and reducing downtime and costs with predictive maintenance.

It enhances safety by continuously monitoring critical components, ensuring smooth and reliable operation. Additionally, RM&D optimizes elevator performance, extends equipment lifespan, and improves overall service quality.

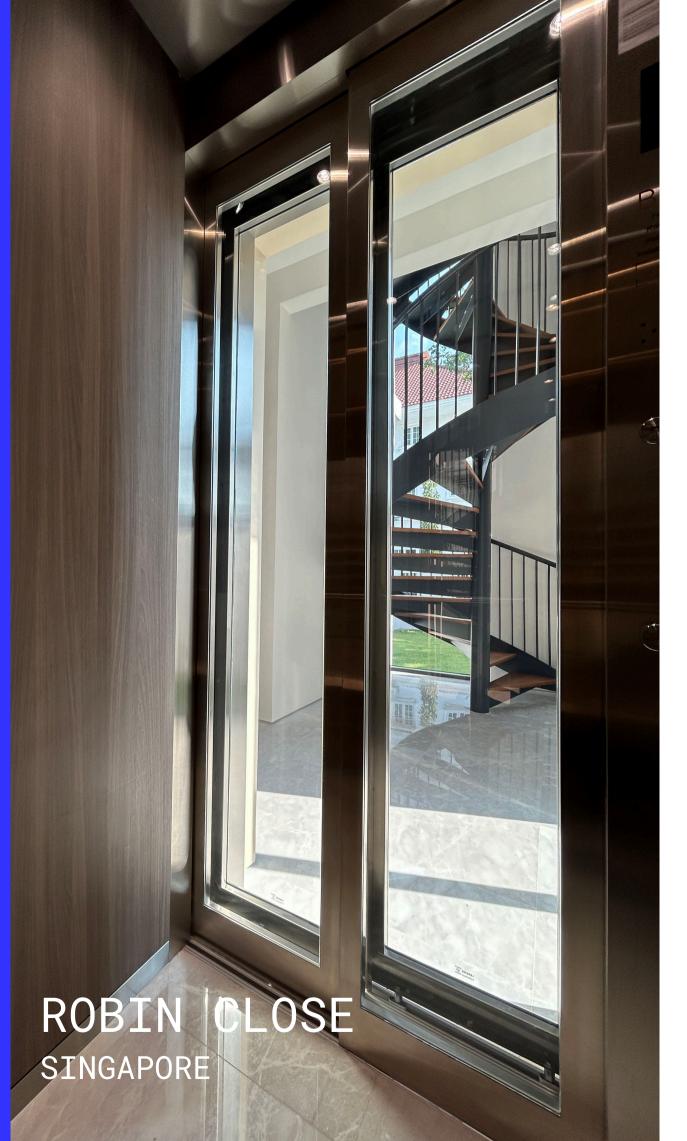

HES-6800 Technical Specifications



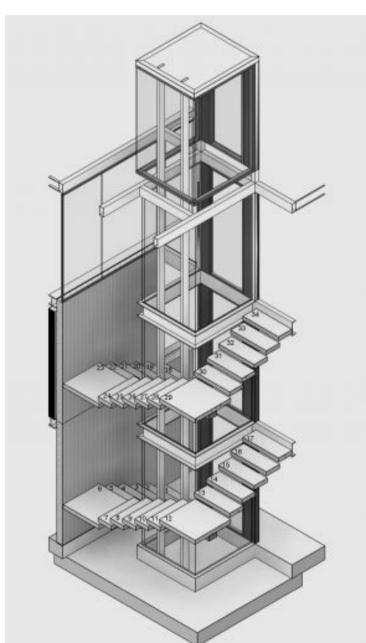

Ideal for private villas, landed properties and compact shaft requirements

SS550:2020 EN81-20/50 375KG - 525KG UP TO 5 STOPS

MAX TRAVEL HEIGHT 20M SINGLE-PHASE &/OR 3-PHASE OPTIONS 0.63 M/S OR 1.00 M/S

SINGLE/ADJACENT/THROUGH CAR DOOR ENTRANCE 1200MM-1500MM MIN PIT DEPTH (CLEAR) 3800MM MIN OVERHEAD (CLEAR)

TOUCHLESS BUTTON
TOUCH SCREEN PANEL
LANDING DISPLAY INDICATOR

AUTODIALER & ALARM BELL AUTOMATIC RESCUE DEVICE OVERLOAD SENSOR & BUZZER INFRARED LIGHT CURTAIN


MUSIC BOX SLEEP MODE VOICE SYNTHESIZER & CAR GONG

Single Opening



SINGLE OPENING											
Rated Capacity (kg/pax)	Door Width (mm)	Hoistway Dimension		Cabin Dimension			Door	Minimum	Minimum	COP Location	
		Width (mm)	Depth (mm)	Width (mm)	Depth (mm)	Clear Height (mm)	Height (mm)	Overhead Height (mm)	Pit Depth (mm)	Front Return Panel	Side Wall Panel
400KG / 5PAX	800	1670	1520	1000	1150	2150	2100	3800	1500	/	✓
400KG / 01 AX						2300	2200	3950	1500		
	800	1670	1620	1000	1250	2150	2100	3800	1200	✓	✓
450KG / 6PAX						2300	2200	3950	1200		,
		1670	1670	1000	1300	2150	2100	3800	1200	✓	✓
	800					2300	2200	3950	1200		
		1720	1570	1050	1200	2150	2100	3800	1200	✓	✓
100110 / 017111						2300	2200	3950	1200		<u> </u>
	900	1770	1520	1100	1150	2150	2100	3800	1500	/	✓
						2300	2200	3950	1500		
		1750	1570	1050	1200	2150	2100	3800	1200		√
						2300	2200	3950	1200		
525KG / 7PAX	800	1720	1620	1050	1250	2150	2100	3800	1200	√	✓
						2300	2200	3950	1200		
	900	1770	1620	1100	1250	2150	2100	3800	1200	· /	✓
						2300	2200	3950	1200		•
		1770	1670	1100	1300	2150	2100	3800	1200	~	✓
						2300	2200	3950	1200		

Single Opening



Through Opening



THROUGH OPENING											
Rated Capacity (kg/pax)	Door Width (mm)	Hoistway Dimension		Cabin Dimension			Door	Minimum	Minimum	COP Location	
		Width (mm)	Depth (mm)	Width (mm)	Depth (mm)	Clear Height (mm)	Height (mm)	Overhead Height (mm)	Pit Depth (mm)	Front Return Panel	Side Wall Panel
400KG / 5PAX	800	1670	1750	1000	1150	2150	2100	3800	1500	✓	✓
						2300	2200	3950	1500	✓	✓
450KG / 6PAX	800	1720	1800	1050	1200	2150	2100	3800	1200	✓	✓
	800	1720	1800	1030	1200	2300	2200	3950	1200	✓	✓
	900	1750	1800	1050	1200	2150	2100	3800	1200		✓
	300	1/50	1000	1030	1200	2300	2200	3950	1200		✓
525KG / 7PAX	900	1770	1900	1100	1300	2150	2100	3800	1200	✓	✓
	900					2300	2200	3950	1200	✓	✓


Adjacent Opening




16

ADJACENT OPENING											
Rated Capacity (kg/pax)	Door Width (mm)	Hoistway Dimension		Cabin Dimension			Door	Minimum	Minimum	COP Location	
		Width (mm)	Depth (mm)	Width (mm)	Depth (mm)	Clear Height (mm)	Height (mm)	Overhead Height (mm)	Pit Depth (mm)	Front Return Panel	Side Wall Panel
400KG / 5PAX	800	1650	1750	1000	1150	2150	2100	3800	1500	✓	✓
						2300	2200	3950	1500	✓	✓
450KG / 6PAX	800	1650	1800	1000	1200	2150	2100	3800	1500	✓	✓
						2300	2200	3950	1500	>	✓
525KG / 7PAX	800	1750	1900	1100	1300	2150	2100	3800	1200	>	✓
	800	1/50	1900	1100	1300	2300	2200	3950	1200	✓	✓

Through Opening



Adjacent Opening





CABIN STYLING OPTIONS

Select the theme that match your building interior design.

Choose your favorite hues to create your own unique style.



Style: Stainless

A reflective surface that exudes a premium and effortless quality.

Style: Core

Unique options that add flavour and character to uplevel every interior space.



FRONT VIEW



BRONZE HAIRLINE GOLD HAIRLINE STAINLESS STEEL STAINLESS STEEL BE-WA001 BE-WA001



NON-DIRECTIONAL

STAINLESS STEEL

BE-WA017

BEAD BLAST STAINLESS STEEL BE-WA016



REAR VIEW



ROSE GOLD HAIRLINE STAINLESS STEEL BE-WA001



SATIN STAINLESS STEEL BE-WA015



DARK BLACK HAIRLINE STAINLESS STEEL BE-WA001



HAIRLINE STAINLESS STEEL BE-WA001





BEIGE LUXOR 0719 BE-WA007



GRIGIO LONDRA 0718 BE-WA007



BERO INGO 0720 BE-WA007



BLU FES 0754 BE-WA007



REAR VIEW



GRIGIO BROMO 0724 BE-WA007



GRIGIO ANTRIM 0752 BE-WA007



ROSSO JAIPUR 0751 BE-WA007



20

VERDE COMODORO 0750 BE-WA007

Style: Opulence

These wall panels are the perfect touch of deco metal that offer elevate luxury and sophistication to any space.

Style: Modernist

A style that is current, minimal and timeless.



REAR VIEW





FRONT VIEW

COPPER ALUMINIUM

PLEX ARGENT

D5306

BE-WA007



D5309

BE-WA007









BRONZE ALUMINIUM D2126 BE-WA007



D2052

BE-WA007

YELLOW GREY

RAL1013

BE-WA005

WHITE ALUMINIUM RAL9006 BE-WA005

PLEX GRAPHITE D5310 BE-WA007

KORTEN D5316 BE-WA007

PLEX BRONZETONE D6486 BE-WA007

ALUMINIUM BRUSHED BLACK D8105 BE-WA007

RAL7034 BE-WA005

PAPYRUS WHITE RAL9018 BE-WA005

RAL9016

BE-WA005

GRAPHITE BLACK RAL9011 BE-WA005

PURE WHITE

RAL9010

BE-WA005



22

BE-WA005

21

Style: Matte

Clean and stylish, with a textured feel and sophisticated look to give a space its calm, cool factor.

Style: Essential

design emphasizes two-tone simplicity and contrast. Using two distinct colors to create a visually appealing and effective design.






REAR VIEW



FRONT VIEW

UPPER WALL PANEL

REAR VIEW



TEXTURED MATTE BLACK F-COATING BE-WA005



OILED LEGNO 8846 BE-WA007



GRIGIO LONDRA 0718 BE-WA007



AMERICAN WALNUT 5150 BE-WA007



5487 BE-WA007 LOWER WALL PANEL



NATURAL TEAK 8849 BE-WA007



FRONT VIEW

BLU FES 0754 BE-WA007



GRIGIO ANTRIM 0752 BE-WA007



GRIGIO BROMO 0724 BE-WA007

Style: Metallic

A flawless, timeless and durable addition to elevate the looks and feels of any space.

Style: Elemental

Go metallic in added style with sophisticated panelled detailing that adds texture to your lift interior.



REAR VIEW





FRONT VIEW

BEAD BLAST STAINLESS STEEL BE-WA016



NON-DIRECTIONAL STAINLESS STEEL BE-WA017



SATIN STAINLESS STEEL BE-WA015



HAIRLINE STAINLESS STEEL BE-WA001



NON-DIRECTIONAL STAINLESS STEEL BE-WA017



HAIRLINE STAINLESS STEEL BE-WA001

Style: Timber

Ceiling and wall timber laminate. A touch of organic and natural quality.

Style: Oblong

Ceiling and wall timber laminate with an added rounded side feature to smoothen edges.









FRONT VIEW



OILED LEGNO 8846 BE-WA007



BEIGE OAK 0868 BE-WA007



JARRAH LEGNO 8847 BE-WA007



HAZELNUT CHERRY 0874 BE-WA007



BLACKEN LEGNO 8848 BE-WA007



AMERICAN WALNUT 5150 BE-WA007



NATURAL TEAK 8849 BE-WA007



OILED WALNUT 5487 BE-WA007



OILED LEGNO 8846 BE-WA007



BEIGE OAK 0868 BE-WA007



JARRAH LEGNO 8847 BE-WA007



HAZELNUT CHERRY 0874 BE-WA007



BLACKEN LEGNO 8848 BE-WA007



AMERICAN WALNUT 5150 BE-WA007



NATURAL TEAK 8849 BE-WA007



28

OILED WALNUT 5487 BE-WA007

Style: Oblong Steel

Ceiling and wall steel laminate with an added rounded side feature to smoothen edges.



FRONT VIEW

SIDE WALL PANEL

SATIN

STAINLESS STEEL BE-WA015



HAIRLINE STAINLESS STEEL BE-WA001

REAR WALL PANEL



MENSWEAR PLAID 9536LM BE-WA007

NON-DIRECTIONAL

STAINLESS STEEL

BE-WA017



FLINT PLAID 9535LM BE-WA007



FLANNEL PLAID 9534LM BE-WA007



BEIGE PLAID 9532LM BE-WA007

Style: Oblong Steel

Ceiling and wall steel laminate with an added rounded side feature to smoothen edges.

REAR WALL PANEL



GREIGE TEXTILE 6445 BE-WA007



CHARCOAL TEXTILE 6446 BE-WA007



NEUTRAL WEFT 8826 BE-WA007



30

INDIGO RAW SILK 9524 BE-WA007



ENABLING
PEOPLE
TO MOVE
EFFICIENTLY
COMFORTABLY
AND SAFELY.



ACCESSORIES OPTIONS



Complete the look of your lift with our selection of accessories.

Car Operating Panels & Landing Operating Panels





BE-C0018





BE-C0020 BE-C0021

Display Indicators & **Push Buttons**



BE-DI003 (Standard)

Display Size: 4.3-inch (55mm x 46.1mm) Type: Dot-Matrix Illum.: White/Red Layout: Vertical Interface: COP/LOP



BE-DI006

Display Size: 4.3-inch $(98.4 \text{mm} \times 56.8 \text{mm})$ Type: TFT Display Resolution: 480x272 Background: Static Image Layout: Vertical Interface: COP/LOP



BE-DI004

Display Size: 4.3-inch $(92mm \times 51mm)$ Type: LED-Segment Illum.: White Backlight: Black Layout: Vertical Interface: COP/LOP





BE-DI005

Display Size: 6.4-inch $(128mm \times 93.5mm)$ Type: LED-Segment Illum.: White Backlight: Black

Layout: Vertical/Horizontal

Interface: COP/LOP





Display Size: 7-inch $(154.7 \text{mm} \times 86.5 \text{mm})$ Type: TFT Picture Display Resolution: 800x480 Background: Dynamic Image Layout: Vertical/Horizontal

Interface: COP/LOP Voice Announcer: Yes





BE-L0001



BE-L0038 BE-L0023







BE-L0024



BE-L0026



BE-L0027

Illumination:

Standard button backlights are in white and blue. Non-standard colours are available upon request.



BE-BU001 Bronze, Dark Grey & Silver Finish Stainless Steel



BE-BU005 Bronze, Dark Grey & Silver Finish Stainless Steel



BE-BU007 Stainless Steel Finish



BE-BU010 Stainless Steel Finish

36


LEGEND: SS - STAINLESS STEEL PVDF - POLYVINYLIDENE FLUORIDE

Landing Doors


PSO - Panels Side Opening PCO - Panels Centre Opening




BE-CE001: TIMELESS

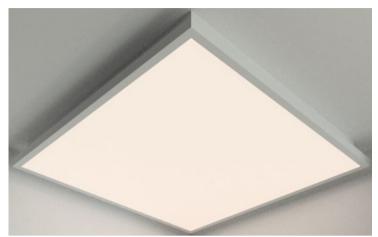


BE-CE003: CLASSIC

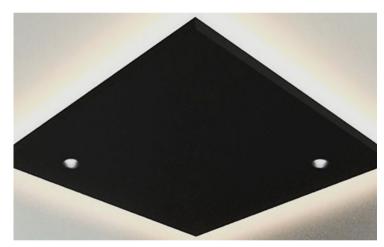


BE-CE011: MOODY

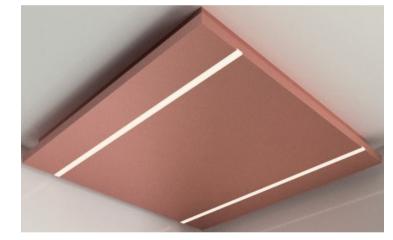

BE-CE012: RETRO

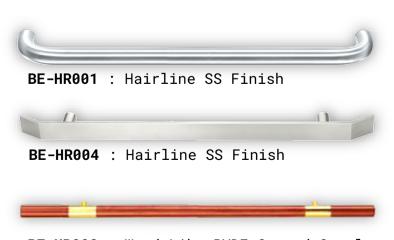

BE-HR008 : Wood-Like PVDF-Coated Steel with Gold Mounting Finish

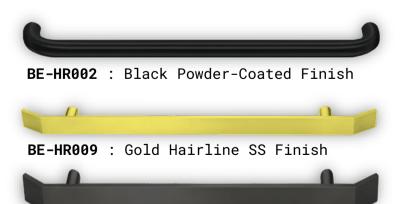

BE-HR011 : Dark Black Titanium Hairline SS Finish



Centre Opening Stainless Steel Framed with Full Height Glass (2PCO)



Side Opening Stainless Steel Framed with Full Height Glass (2PSO)



Centre Opening Stainless Steel (2PCO)




Centre Opening Texture Matte Black Framed with Full Height Glass (2PCO)



Side Opening Stainless Steel (2PSO)



Centre Opening Texture Matte Black Steel (2PCO)

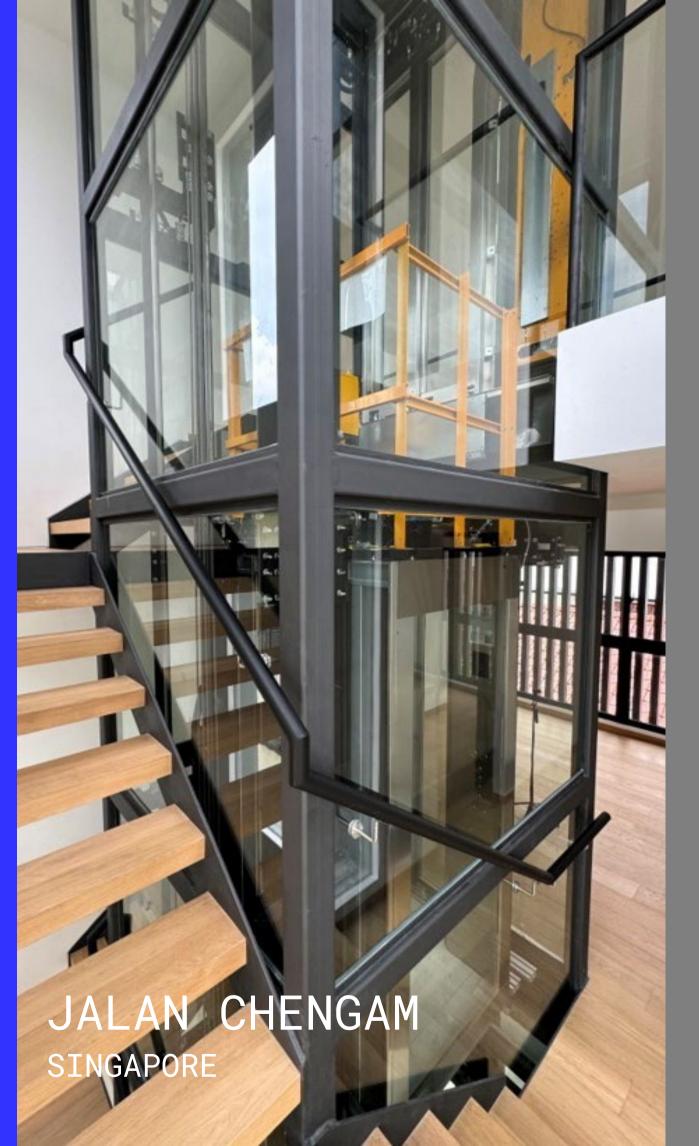

MAINTENANCE SERVICES



Lift maintenance is a critical process to ensure the safety, reliability, and efficiency of elevators. It involves regular inspections, testing, and servicing of the lift components.

Maintenance Services

Maintenance Program

5 YEARS WARRANTY*

For controller, traction machine and hoisting ropes.

*Terms and condition applies

Regular **Inspections**

Component Servicing



Callback Service





Comprehensive



Routine Checks:

Scheduled visits to look for wear and tear.

Operational Testing:

Make sure the elevator runs smoothly and stops accurately.

Safety Device Checks:

Ensure emergency brakes, alarms, and lights work.

Lubrication:

Keep moving parts welloiled.

Adjustments:

Fine-tune doors, brakes. and controls.

Cleaning:

Remove dust and debris from the shaft and machinery.

24/7 Availability:

Services to attend issues anytime promptly.

Rapid Response:

Technicians are quickly dispatched to diagnose and fix problems.

Emergency Handling:

Prioritizes emergencies like trapped passengers or major malfunctions.

Standard **Program**

04 site visits annually. 12 site visits annually.

24hr unlimited callback emergency assistant.

Load test inspection for PTO renewal annually.

Program



42

04 site visits annually. 12 site visits annually.

24hr unlimited callback emergency assistant.

Load test inspection for PTO renewal annually.

All-inclusive repairs except for selected items.

Repairs and **Replacements**

Replace Worn Parts:

and electronics as

needed.

Upgrades:

efficiency

for safety and

Change cables, pulleys,

Implement improvements



Annual Load Test and Inspection




To engage a Specialist Professional Engineer (SPE) and jointly conduct no-load/ fullload test

and examination as per BCA prevailing standards for annual PTO renewal.

Predictive Maintenance

Connect your elevator to our IoT-enabled system for Remote Monitoring and Diagnostics (RM&D), allowing real-time tracking of lift operations. This integration detects issues early, reduces downtime, and lowers costs through predictive maintenance.

Artificial Intelligence (AI) assists in predicting future failures. enabling early intervention with proactive issue resolution before breakdowns occur.

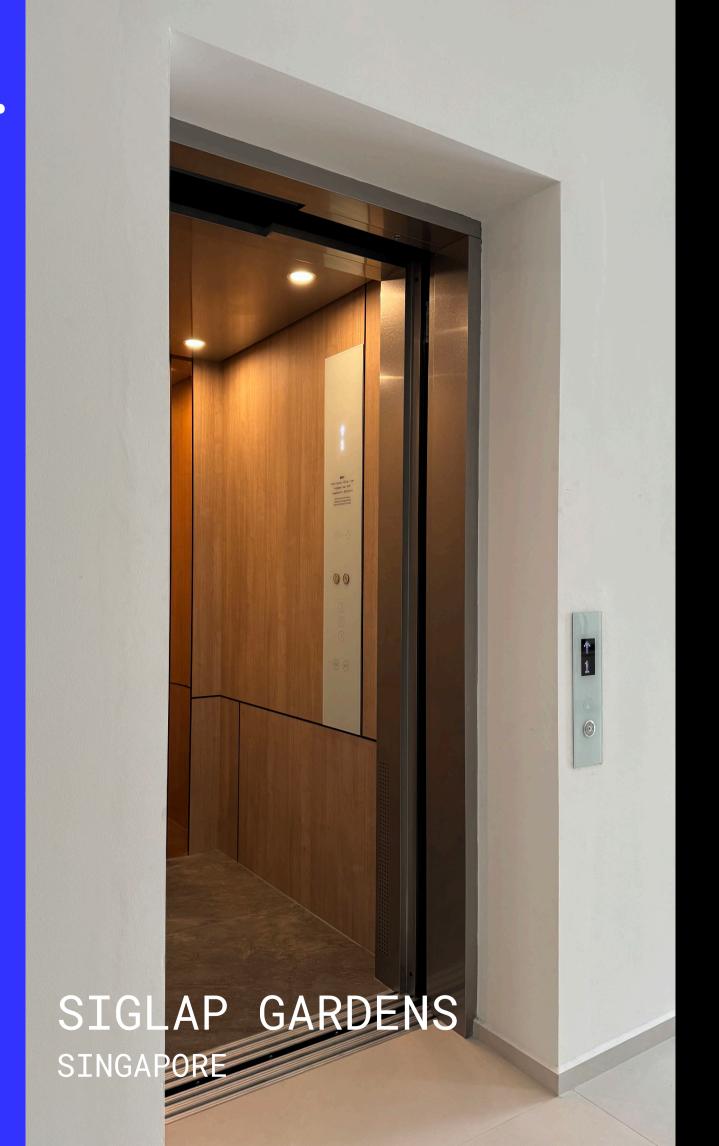

Contact us

Visit.

29 Tai Seng Avenue, #02-02 Singapore 534119

Call.

+65 6383 9008

Email.

sales@beliftsg.com

Disclaimer: All materials are sole property of Belift Pte Ltd and shall not be published, copied or disseminated without prior approval from Belift Pte Ltd. The contents herein are estimated for sensing purposes only and subject to changes without prior notification.



